




HIGH-PERFORMANCE LASER DIODE ILLUMINATOR

OVERVIEW

The LDI is a multiline, solid-state laser illuminator offering up to 1000mW of output power per laser line via a multimode fiber at the price of a low power LED light engine. With feedback controlled output stability and up to a 100:1 linear dynamic range, the LDI is the ideal light source for a wide range of applications including spinning disk confocal microscopy, structured illumination microscopy, FRAP, PALM/STORM, photoactivation/ photoconversion, and spatial biology.

The LDI offers the most cost efficient price-to-performance ratio of any laser source available on the market today.

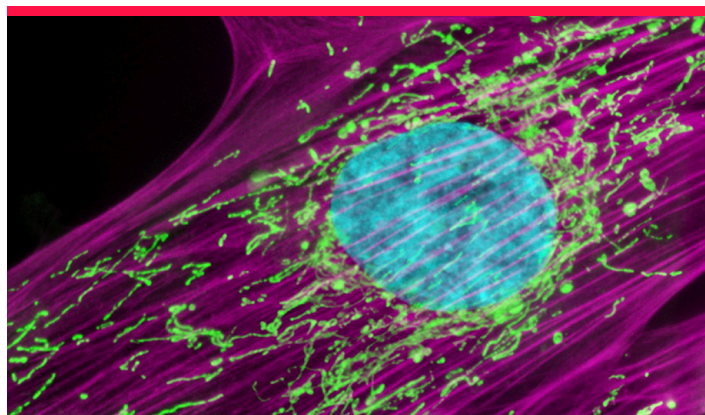

APPLICATIONS

- Spinning Disk Confocal Microscopy
- Super Resolution SIM Imaging
- PALM/STORM
- Optogenetics with DLPs or Multiport Illuminator
- Photoactivation/Photoconversion/FRAP
- FRAP with SLM or Multiport Illuminator
- Spatial Biology



FEATURES AND BENEFITS

HIGH OUTPUT POWER:

- Shorter exposures
- Faster imaging
- Faster activation times in optogenetics and photoactivation experiments
- Faster bleaching times in FRAP experiments

FEEDBACK CONTROLLED OPTICAL STABILITY:

- Quantitative imaging, ideally suited for ratiometric imaging
- More repeatable optogenetics experiments

UP TO 100:1 LINEAR DYNAMIC RANGE:

- Ability to turn power down when needed and maintain stability

7 LASER DIODES:

- Covers most of the standard fluorescence probes

NO USER ALIGNMENT:

- Easy to use and maintain

LDI-7

HIGH-PERFORMANCE LASER DIODE ILLUMINATOR

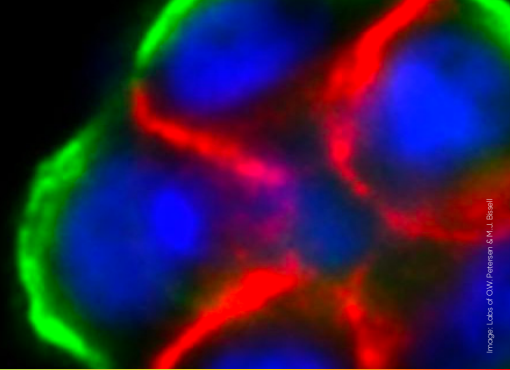



Image: Labs of CW Peleman & M. J. Bessell

LASER LINES AVAILABLE

405 Laser Line (nm)	300 Power (mW)*
445	1000
470	1000
520	500
528	500
555	1000
640	400

*Measured out of fiber (400 μm, 0.39 NA)

LDI-7 Output Spectra

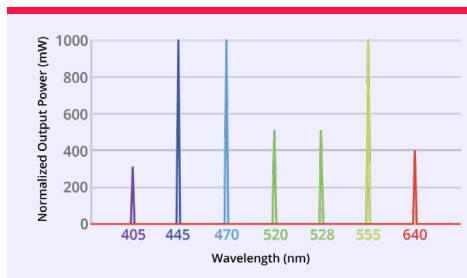

SPECIFICATIONS

Source Type	Laser Diodes							
Lifetime	20,000 hrs – 2 year warranty							
Laser Line (nm)	405	445	470	520	528	555	640	
Width; Max FWHM (nm)	1.8	2.2	2.2	3.8	4.0	1.6	2.0	
Centroid Wavelength Range (nm) ¹	397–407	438–450	463–470	514–523	526–535	552–557	632–644	
Continuous Wave Stability ²	< 2%	< 2%	< 2%	< 2%	< 2%	< 2%	< 2%	
Optical Power Min (mW) ¹	300	1000	1000	500	500	1000	400	
Max Rise Time ¹	< 10 μs	< 10 μs	< 10 μs	< 10 μs	< 10 μs	< 2 ms	< 10 μs	
Max On/Off Frequency (Hz) ³	> 1000	> 1000	> 1000	> 1000	> 1000	100	> 1000	
Output Options	optical fiber ⁴							
Control Options	TTL (>2.3 V) Analog (0–5 V) USB–DSP (virtual COM port) – SDK available upon request							
Safety	Interlocked housing Safety interlock Key interlock IEC 60825 compliant							
Dimensions	12.5" x 9.2" x 5.75", 318mm x 234mm x 146mm							
Weight	~9 lbs							
Operating Temperature	15–30° C							
Storage Temperature	–18–50° C							
Humidity	< 80% non–condensing							
Voltage	90–220 V AC, 50–60 Hz							
Fuse	None							

1. Measured at 100% intensity, 23°C ± 2°C

2. RMSE relative to the mean power measurements, measured at 100% intensity, 23°C ± 2°C

3. Measured at 100% intensity, 50% duty cycle

4. Recommended output fiber is 400 μm, 0.39 NA bifurcated fiber

DANGER - LASER RADIATION AVOID EYE OR SKIN EXPOSURE TO DIRECT OR SCATTERED RADIATION CLASS 4 LASER PRODUCT

89 North and the 89 North logo are registered trademarks of 89 North, Inc. All specifications are subject to change.

Document Number: 01-00000001190, Rev A



20 Winter Sport Lane, Suite 135, Williston, VT 05495 US | sales@89north.com
www.89North.com | toll free 1.877.417.8313 | main +1.802.881.0302 | fax +1.802.881.0308